



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： Ø15 白色平面管

规格： ULA-Ø15WW-2B

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路 4 号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



PART NO.: ULA-Ø15WW-2B

ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Wave Length	λP	---	---	---	nm	IF=20mA(Note1)
Chromaticity Coordinates	X	---	---	---	---	IF=20mA
	Y	---	---	---		IF=20mA
Luminous Intensity	ϕ	---	2.2	---	LM	IF=20mA
Viewing Angle	$2\theta 1/2$	--	----	--	Deg	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

- Reverse Voltage.....5V
- Reverse Current($V_R=5V$).....20 μ A
- Operating Temperature Range.....-25°C~+80°C
- Storage Temperature Range.....-30°C~+80°C AA
- Lead Soldering Temperature.....260°C For 5 Seconds

PACKAGE DIMENSION:

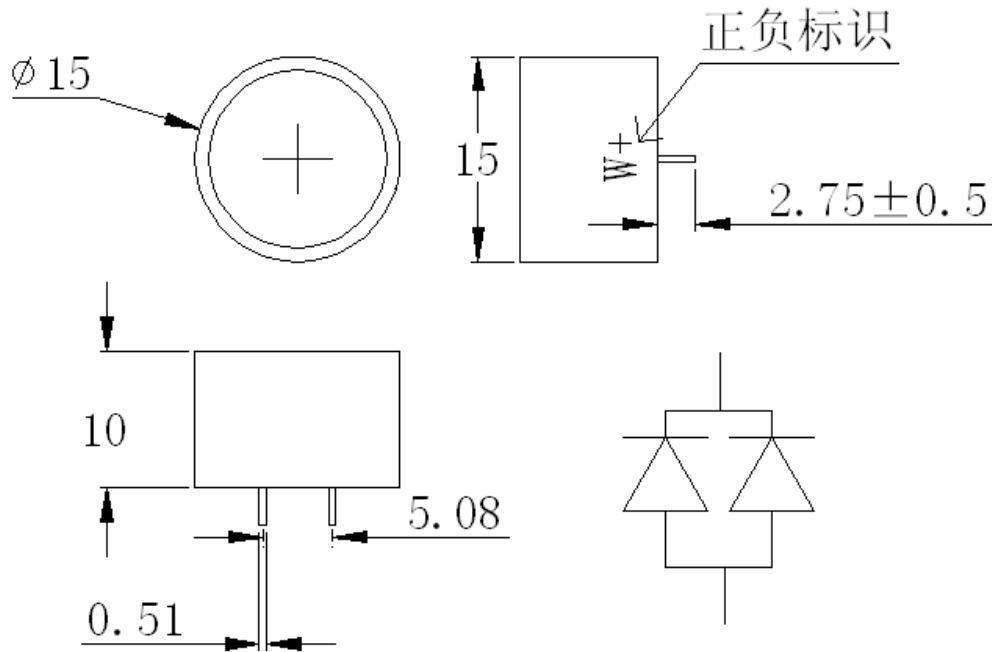

尺寸公差为: $\pm 0.2mm$

客户名称:

工程确认:

日期:



PART NO.: ULA-Ø15WW-2B

TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVE:

