



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELLY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

样品承认书

品名： 平面管 12*12 白色

规格： ULA-1212WE-1B-004-S

编号： 2017-07

客户签字栏		
核准	审核	承认

本公司签字栏		
核准	审核	制作

地址：广东省中山市南区昌盛路 4 号

电话：0760-23886633 23886636 23886632

传真：0760-23886658

网址：www.jlul.com

电子邮箱：jinglei@jlul.com



中山市晶艺光电科技有限公司
ZHONGSHAN JEWELRY OPTOELECTRONIC TECHNOLOGY CO.,LTD.

PART NO.: ULA-1212WE-1B-004-S

White:ELECTRICAL AND OPTICAL CHARACTERISTICS(Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Chromaticity Coordinates	X	0.267	---	0.2857	---	IF=20mA
	Y	0.282	---	0.3183		IF=20mA
Luminous Intensity	IV	500	---	720	mcd	IF=20mA
Viewing Angle	2 θ 1/2	--	120	/	Deg	IF=20mA
Forward voltage	VF	2.6	3.0	3.8	V	IF=20mA

Remark:Viewing angle is the Off-axis angle at which the luminous intensity is half the axial luminous intensity.






Reverse Voltage.....5V

Reverse Current(V_R=5V).....20 μ A

Operating Temperature Range.....-25°C~+80°C

Storage Temperature Range.....-30°C~+80°C

Lead Soldering Temperature..... 260°C For 5 Seconds

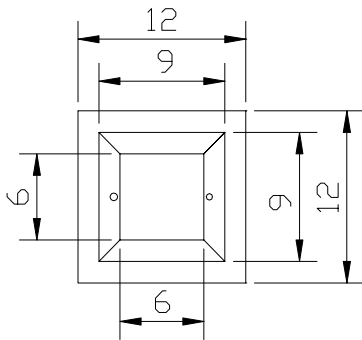

要求：2根引脚要焊锡



WH-DY



WH-SM



WH-SF



WH-DS

注：面膜尺寸为 12*12mm
未标注尺寸±0.2mm

客户名称：

工程确认：

日期：



PART NO.: ULA-1212WE-1B-004-S

White:ELECTRICAL AND OPTICAL CHARACTERISTICS

